


## COMBINER, 2 INPUT / 1 OUTPUT

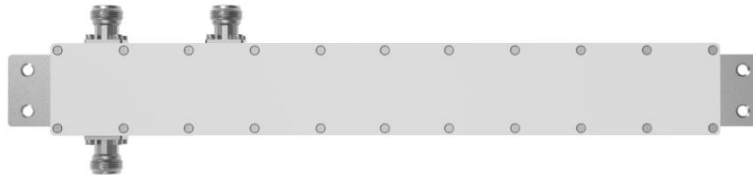

| Electrical Specification          |                  |
|-----------------------------------|------------------|
| Frequency Range, MHz              | 136-174          |
| Insertion Loss, dB                | 3.5              |
| Isolation, dB                     | 24 Min.          |
| VSWR                              | ≤1.25            |
| Impedance, Ω                      | 50               |
| Max Power, Watts                  | 300 (per port)   |
| Lightening Protection             | DC Ground        |
| Mechanical Specification          |                  |
| Connectors                        | N(F)             |
| Dimension, mm (subject to change) | 305 x 42 x 33    |
| Operating Temperature, °C         | -30 to +70       |
| Humidity                          | 5% - 95%         |
| Application                       | Indoor & Outdoor |